


Sensor, Series SN5-X

- 3-pin
- welding-proof
- With stretched impulse
- Sensor responds to ferromagnetic material.



Ambient temperature min./max.	-10 ... 70 °C
Protection class	IP65
Nominal current, actuated state	25 mA
Quiescent current (without load)	14 mA
LED status display	See table below
Weight	0,05 kg

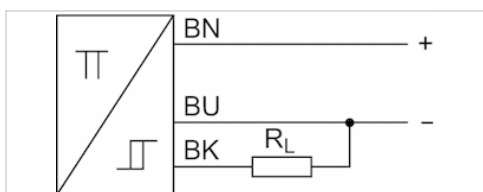

Technical data

Part No.	Type of contact	Voltage drop U at I _{max}	LED status display	Version	Switch signal
0830100500	electronic PNP	≤ 2,0 V	Red	Protected against polarity reversal	With stretched impulse
0830100502	electronic PNP	≤ 2,0 V	Red, Green	Protected against polarity reversal	With stretched impulse

Part No.	welding-proof
0830100500	welding-proof
0830100502	welding-proof


Technical information

Sensor responds to ferromagnetic material.

Technical information

Material	
Housing	epoxy resin

Dimensions

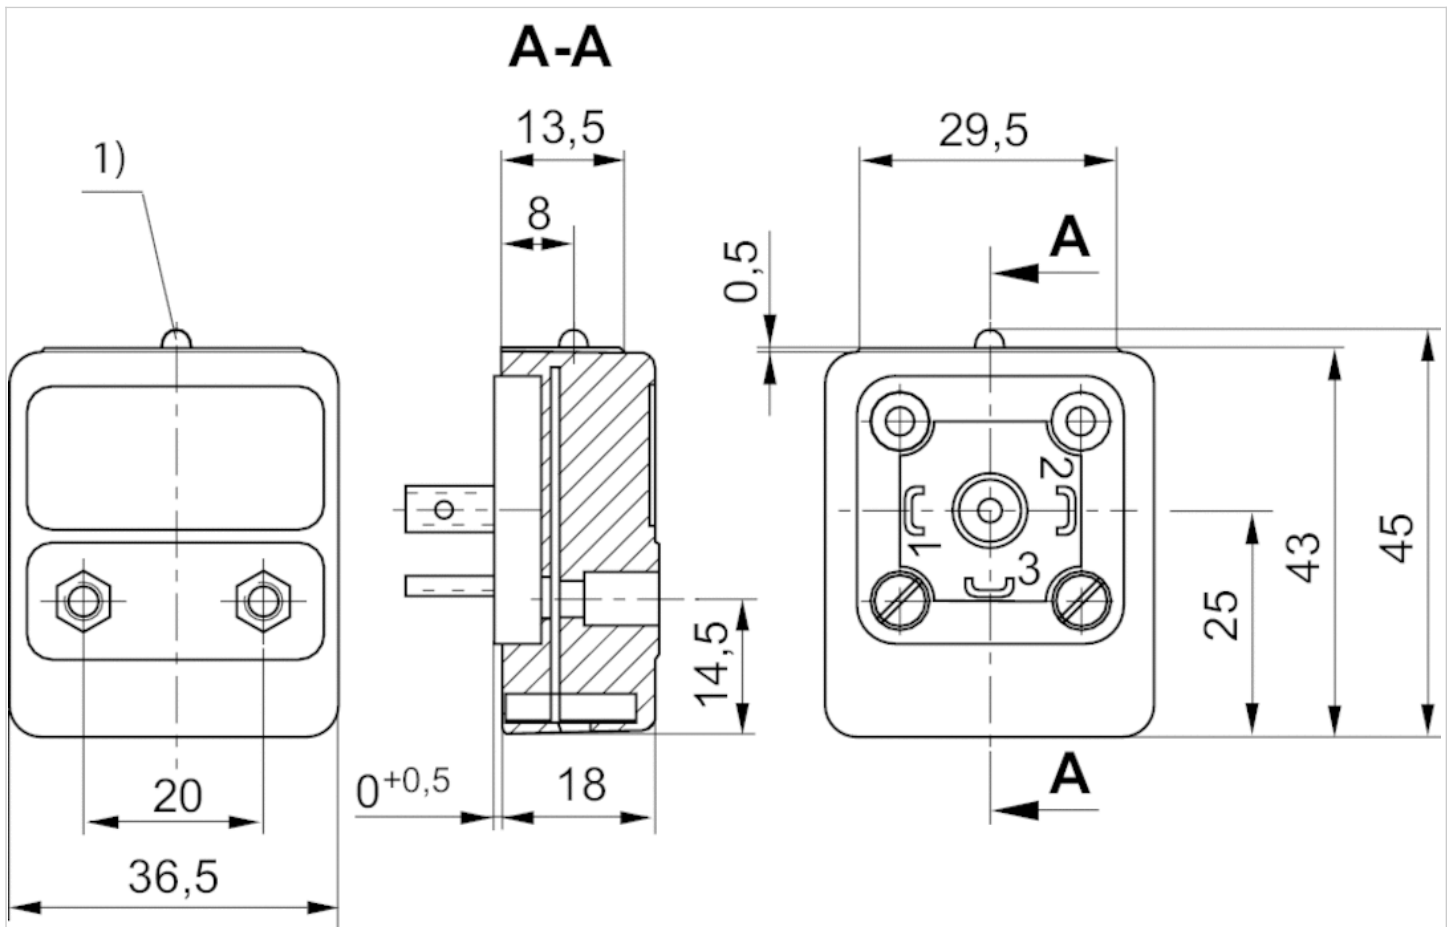

1) LED



Siège Social Douala - Cameroun - B.P. 12591 Douala
contact@2comappro.com
Tél : +237 233 424 913
et +237 674 472 158

www.2comappro.com