

Radial piston motor for hydraulic drive assist

MCR-R

Series 41

RE 15223

Edition: 03.2017

Replace 07.2015



- ▶ Frame size MCR 10
- ▶ Displacement 780cc and 1120cc
- ▶ Differential pressure up to 450 bar
- ▶ Torque output up to 6420 Nm
- ▶ Drive speed up to 215 rpm
- ▶ Freewheel speed up to 600 rpm
- ▶ Open and closed circuits

Features

- ▶ Compact robust construction
- ▶ Rotating case design
- ▶ High volumetric and mechanical efficiencies
- ▶ High pressure rating
- ▶ High reliability
- ▶ Low maintenance
- ▶ Smooth running at very low speeds
- ▶ Low noise
- ▶ Integrated flushing in drive and freewheel

Contents


Functional description	2
Ordering code	4
Technical data	5
Dimensions	7
Selection guide	8



Siège Social Douala - Cameroun B.P. 12591 Douala
 contact@2comappro.com
 Tél : + 237 233 424 913
 et + 237 674 472 158

www.2comappro.com

Functional description

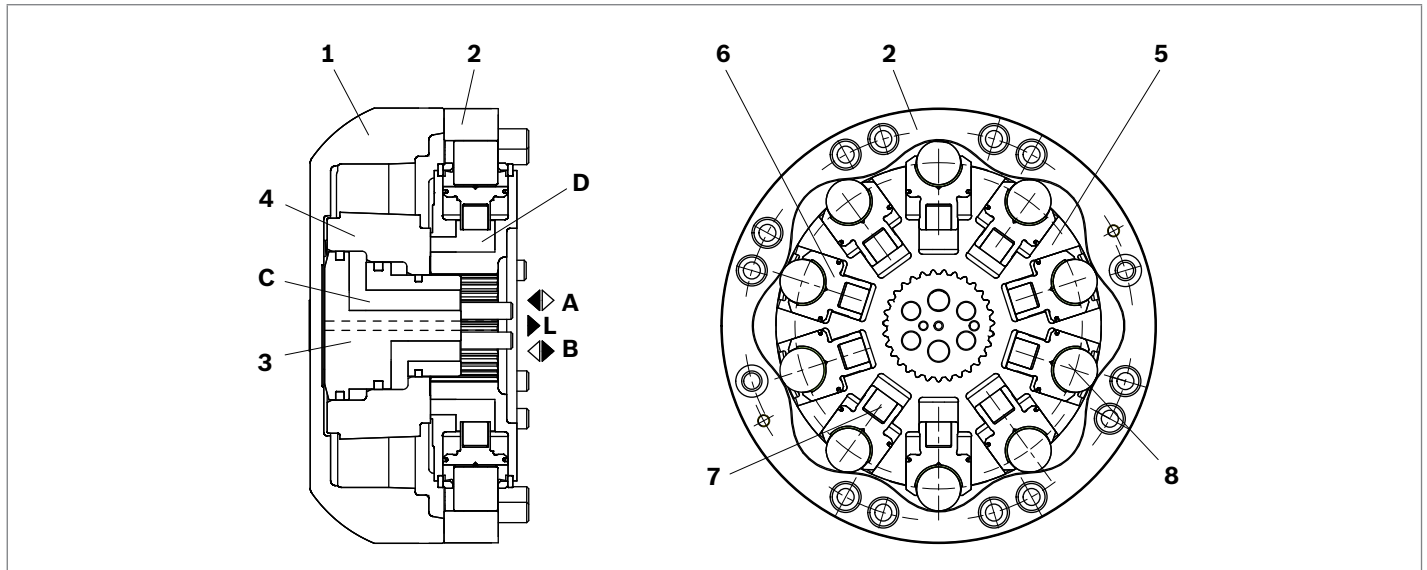

Hydraulic motor type MCR-R is a radial piston motor with a rotating case designed for installation on a vehicle axle to provide hydraulic drive to its wheel.


Construction

Rotating assembly consisting of case (1), cam (2) and distributor (4). Cylinder block (5) containing pistons (6) fitted with magnets (7). Fixed stub axle extension (3).

Transmission

The cylinder block (5) is splined onto the vehicle's axle. The pistons (6) are arranged radially in the cylinder block (5) and make contact with the cam (2) via rollers (8). The extension of the pistons (6) acting upon the cam (2) drives the rotating assembly which is bolted to the vehicle's wheel hub.

Torque generation

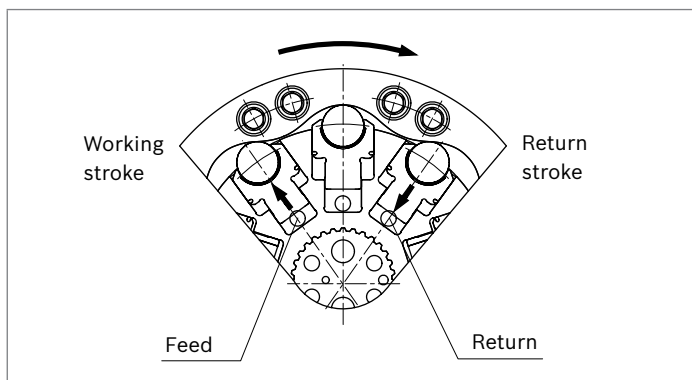

The number of working and return strokes corresponds to the number of lobes on the cam multiplied by number of pistons in the cylinder block.

Flow paths

Ports **A**, **B** and **L** are connected to galleries drilled through the vehicle axle. The galleries in the stub axle extension (**C**) direct the oil via the distributor (**4**) into the cylinder chambers (**D**). The **L** port returns leakage oil from the motor case.

Freewheeling

When not in drive mode the motor is selected to freewheel by relieving ports **A** and **B** to tank and pressurising the case via port **L**. This pushes the pistons back into the cylinder block and holds the rollers clear of the cam. In the event of loss of hydraulic pressure the magnets in the base of each piston (**7**) will hold them in the retracted position.

Motor flushing

In a closed circuit hydraulic system, the same fluid circulates between the pump and the motor. If the system was run under these conditions for any length of time the fluid would soon overheat. To address this the MCR-R has an integral flushing system which allows a controlled flow of fluid to be diverted from the system and back to tank via the system cooling arrangement.

The MCR-R includes features to enable integral flushing in both drive and freewheel modes, flushing during freewheel is of particular importance due to the higher operating speeds.


Flushing during drive

Pressure differential between **A** and **B** will cause the flushing spool (1) to shift and connect the low pressure return flow to the flushing poppet (2). If the return pressure is above a predetermined level the flushing poppet will open and allow fluid flow to tank via the motor case drain (L). The standard setting for the poppet cut off is 14 bar. This is to protect other system functions by closing off flushing flow if system return (charge) pressure drops below this value. The flushing flow rate is determined by the flushing poppet orifice (3). Different sizes of orifice are available to vary the flow depending upon system requirements.

Flushing during freewheel

During freewheel, **A** and **B** ports are connected to tank and a fluid flow is applied to the **L** port to pressurise the motor's case and push the pistons back into the cylinder block. Poppets (4) will open and permit fluid flow from the case back to tank via the **A** and **B** ports.

▼ **Motor with flushing valve**

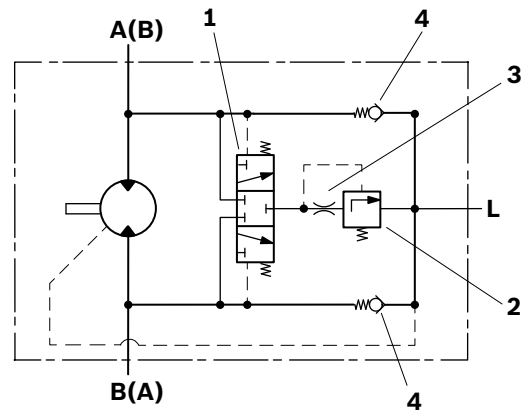

Flushing flow rates

Flushing code	Orifice size (mm)	Flow (l/min) at 25 bar ¹⁾	
		min	max
F1	ø1	2.2	2.7
F2	ø1.5	5.0	6.1
F7	ø1.7	6.4	7.8
F4	ø2	8.2	10.7
F6	ø2.3	8.8	11.4

1) 0.6 mm Shim (Standard), Cracking pressure = 11±3 bar

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13
MCR	10	R		Z	Z	/	41	A0		1L		

Radial piston motor

01	Radial-piston type, low-speed, high-torque motor	MCR
----	--	------------

Frame size

02	Frame size 10	10
----	---------------	-----------

Housing type

03	Rotating case hydrobase	R
----	-------------------------	----------

Nominal size, displacement V_g in cm^3/rev

04	Frame size 10		780	1120
	Low displacement: motors use standard cylindrical pistons	LD	●	-
	High displacement: motors use stepped pistons	HD	-	●

Drive shaft

05	Without drive shaft	Z
----	---------------------	----------

Through shaft

06	Without through shaft	Z
----	-----------------------	----------

Series

07	Series 41	41
----	-----------	-----------

Brake

08	Without brake	A0
----	---------------	-----------

Seals

09	NBR (nitrile rubber)	M
	FKM (fluoroelastomer)	V

Direction of rotation

10	Viewed from inboard end of stub axle extension, clockwise with flow into port A	1L
----	---	-----------

Flushing

11	Without flushing (no code)	
	With flushing (see table on page 3)	F1-F7

Special order

12	Special feature	SOXXX
----	-----------------	--------------

Other

13	Mark in text here	*
----	-------------------	---

● = Available - = Not available

Technical data

Frame size			MCR10R	
Type of mounting			Hydrobase - rotating case	
Pipe connections ¹⁾²⁾			Integral to stub axle	
Displacement	V_g	cm ³ /rev	780	1120
Output torque				
Specific torque (at $\Delta p = 250$ bar)		Nm	3100	4520
Maximum torque ³⁾	T_{max}	Nm	5580	6420
Output speed				
Minimum speed for smooth running ⁴⁾	n_{min}	rpm	0.5	0.5
Maximum speed ⁵⁾⁶⁾	n_{max}	rpm	215	150
Maximum freewheel speed ¹⁰⁾		rpm	600	600
Pressure				
Maximum differential pressure ³⁾⁷⁾	Δp_{max}	bar	450	400
Maximum pressure at port "A" or "B" ³⁾⁷⁾	p_{max}	bar	470	420
Maximum case drain pressure	$p_{case\ max}$	bar	10	10
Operating case pressure	$p_{case\ nom}$	bar	5	5
Weight	m	kg	30	30
Hydraulic fluid ⁸⁾				
Fluid cleanliness			ISO 4406, Class 20/18/15	
Fluid viscosity range	$\nu_{min/max}$	mm ² /s	10 to 2000	
Fluid temperature range ⁹⁾	$\theta_{min/max}$	°C	-20 to +85	

Notice

- ▶ Motor performance values are based on theoretical calculations.
- ▶ Efficiencies are not taken into consideration for theoretical calculations.

Please refer the related foot notes for more details.

1) Ensure motor case is filled with oil prior to start-up.

2) For installation and maintenance details, please see operating manual 15215-01-B

3) Maximum values should only be applied for a small portion of the duty cycle. Please consult Rexroth Engineering, Department in Glenrothes for motor life calculations based on particular operating cases.

4) For continuous operation at speeds <5 rpm please consult Rexroth Engineering Department in Glenrothes.

5) Based on nominal no-load DP of 20 bar

6) Warning! During the running in period of the motor (min. 20 hrs) it should not be run unloaded at >100 rpm.

7) If planning to operate motors in series, please consult Rexroth Engineering Department in Glenrothes.

8) For any other fluid type contact the Engineering Department at Bosch Rexroth, Glenrothes. For more information on hydraulic fluids, see datasheets 90220 and 90223.


9) Extension of the allowable temperature range may be possible depending on specification. Please consult Rexroth Engineering Department in Glenrothes for further details.

10) For limited time speeds up to 720 rpm may be acceptable. Please consult Rexroth Engineering at Glenrothes.


Efficiencies

Data applies after a 20 hour run in time and has been established using a typical axle bearing arrangement.

▼ **Mechanical efficiency**

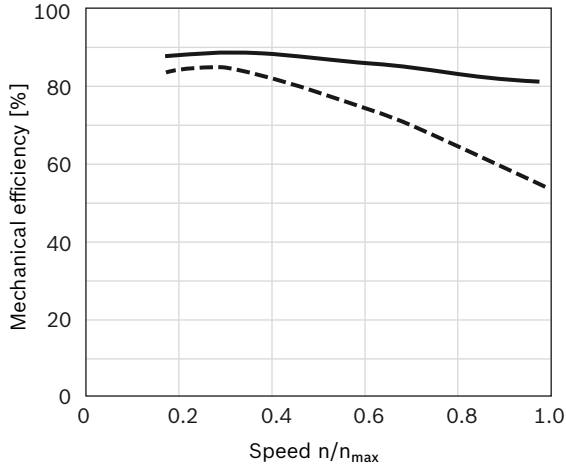

▼ **Volumetric efficiency**

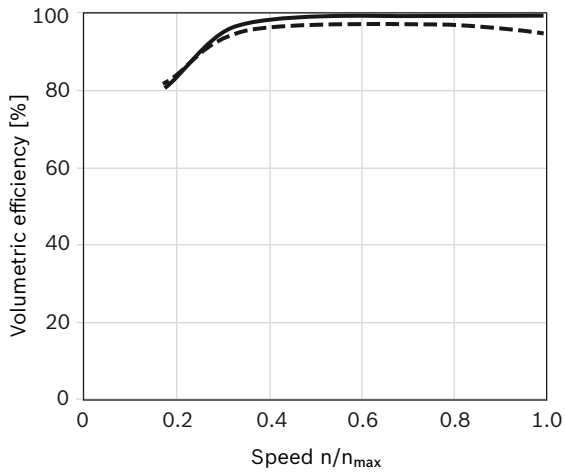


— 100 bar / 1450 psi
 - - - 350 bar / 5100 psi

Minimum charge pressure


Value is based on the requirement at the motor stub axle port.

▼ **Minimum charge pressure in pump mode**

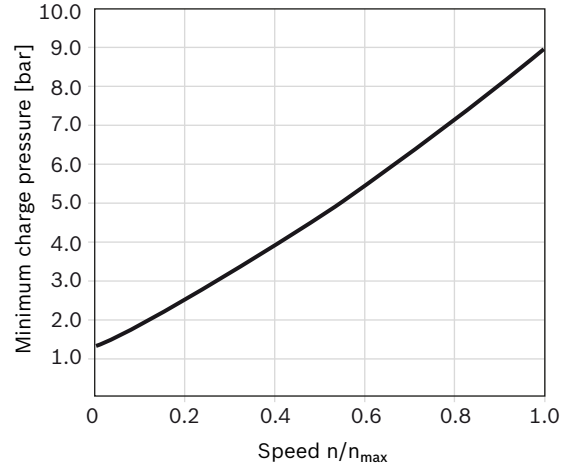

For specific performance information or operating conditions contact the Engineering Department at Bosch Rexroth Glenrothes.

Dimensions

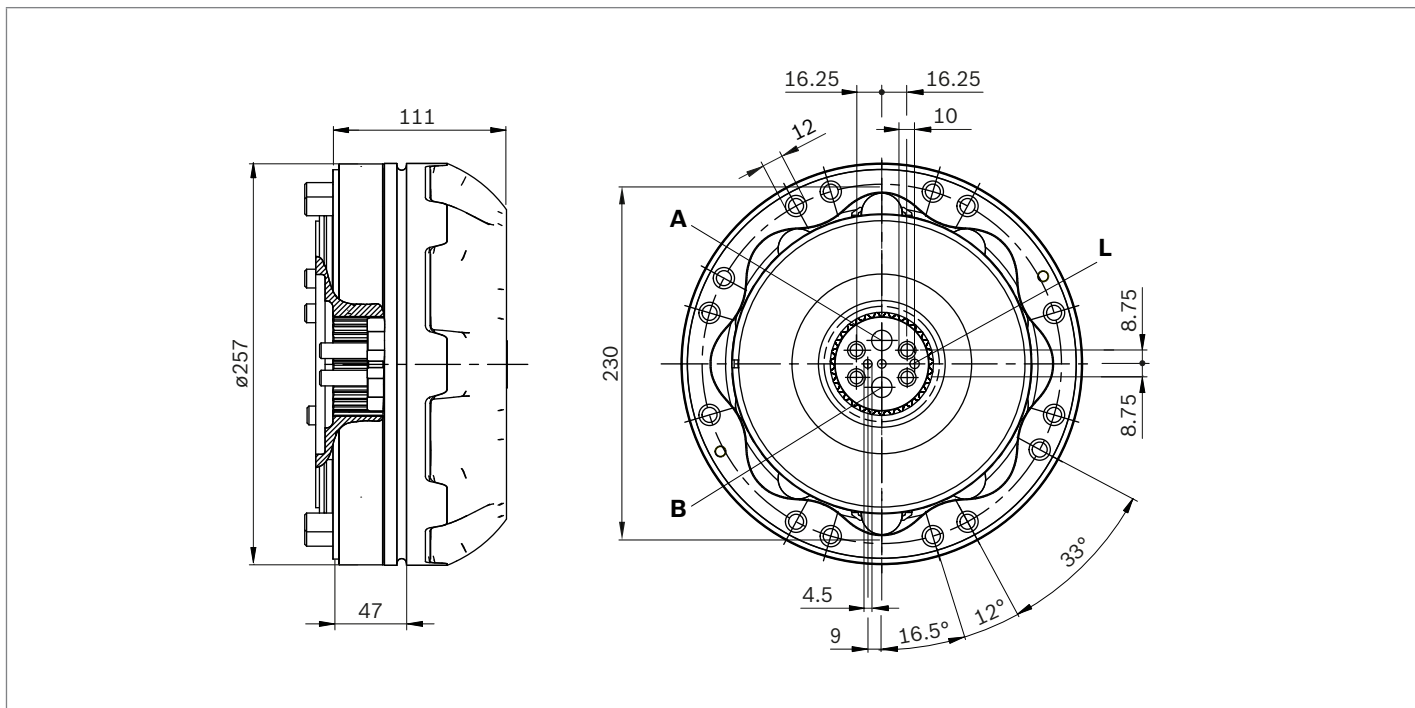

Ports

Designation	Port function	Size	p_{max} [bar]	State ²⁾
A, B	Inlet, outlet	$\varnothing 12$	470/420 ¹⁾	O
L	Case drain	$\varnothing 5$	10	O

1) Depending upon displacement

2) O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)











Before finalizing your design, request a binding installation drawing.



Siège Social Douala - Cameroun B.P. 12591 Douala
 contact@2comappro.com
 Tél : + 237 233 424 913
 et + 237 674 472 158

www.2comappro.com

Selection guide

Data sheet	Motor type Application		Frame size					
			3 160..400 cc	5 380..820 cc	6 820..920 cc	10 780..1340 cc	15 1130..2150 cc	20 1750..3000 cc
15198	MCR-F Wheel drives		•	•	-	•	•	-
15200	MCR-W Heavy duty wheel drives		•	•	-	•	-	-
15195	MCR-A Frame integrated drives		•	•	-	•	•	-
15199	MCR-H Integrated drives		•	•	-	•	•	•
15221	MCR-T Track drives		-	•	•	•	-	-
15223	MCR-R Series 41 Hydraulic drive assist		-	-	-	•	-	-
15214	MCR-X Slew drives		•	•	-	-	-	-
15197	MCR-C Compact drives		-	-	-	-	-	•
15196	MCR-D Industrial applications		•	•	-	•	-	-
	MCR-E Industrial applications		-	•	-	-	-	-

Bosch Rexroth Limited
Viewfield Industrial Estate
Glenrothes, Fife
Scotland, KY6 2RD
UK
Phone +44 15 92 631 777
Telefax +44 15 92 631 936
www.boschrexroth.com

© Bosch Rexroth AG 2017. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights. The data specified within only serves to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.